
ZEFIRO 9

Certificate model name: ZEFIRO 9 T2

www.cadelsrl.com



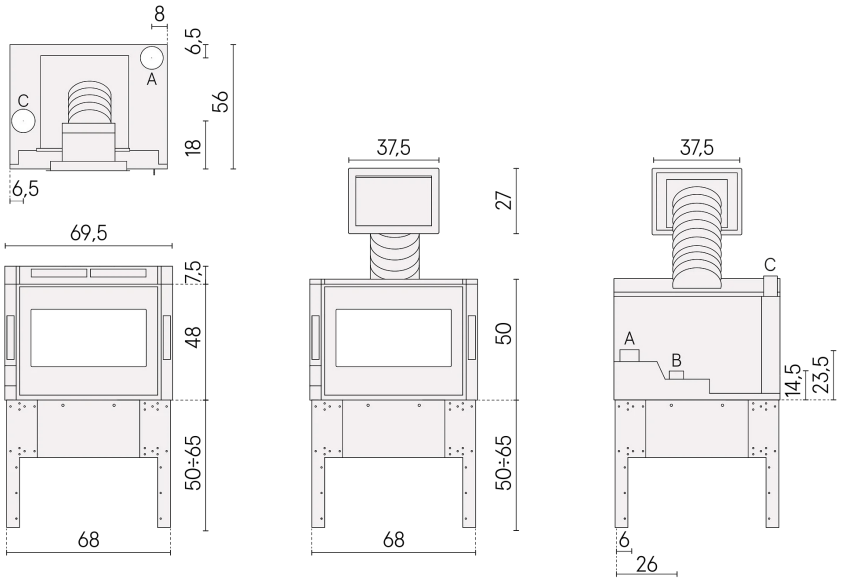

Pellet Air

TECHNICAL DATA

Thermic Power (at min-at max)	kW	3,5 - 9,0
Introduced thermal power (at max)	kW	9,9
Water useful power (at min-at max)	kW	_ - _
Seasonal energy efficiency	ηs [%]	85
Useful efficiency (at min-at max)	%	91 - 90
Heatable volume (at min-at max)	m³	98 - 252
CO_2 (min-max)	%	5,4- 9,1
Emissions CO (13% O_2) (at min-at max)	mg/Nm³	140 - 125
Emissions OGC (13%O_2) (at min-at max)	mg/Nm³	2,0- 2,0
Emissions NOX (13% O_2) (at min-at max)	mg/Nm³	120 - 99
Dust content at 13% O_2 (at min-at max)	mg/Nm³	20 - 15
Fuel Pellet	mm	Ø6 L=3÷40
Hopper capacity	kg	15
Hourly consumption (at min-at max)	kg/h	0,8 - 2,0
Autonomy (at min-at max)	h	19 - 8
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	316
Operating electrical absorption (at max)	W	114
Draught for chimney sizing calculation (EN13384-1)	Pa	2
Mass of smoke (at min-at max)	g/sec	4,7 - 7,1
Exhaust fumes temperature (at min-at max)	°C	90 - 143
Distance from material comb. (back/side/under)	mm	100 / 250 / 0
Distance to material comb. (front/top)	mm	1000 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	60
Appliance Type (tightness)	Type	CC50

PLUS

- Upper exhaust
- Ducting kit (optional)
- Cast iron burning pot
- Connection to the external thermostat
- Comfort mode - Maximum silence
- Cast iron inner
- Weekly programming
- Integrated Wi-Fi and Bluetooth

AVAILABLE FINISHES

7025121	Glass Black	EAN 8053859022374

OPTIONAL

5018002	Pellet loading door	EAN 8053859010265
5024009	Support kit	EAN 8053859020936
5018001	Pellet drawer	EAN 8053859010258
5018005	Ducting kit	EAN 8053859010296
5018006	Frame	EAN 8053859010302
5018007	Drawer frame	EAN 8053859010319

CERTIFICATIONS


European standards
Art. 15A B-VG 2015
BImSchV 2015
Regensburg
München
Stuttgart
Aachen

EN 16510-1:2022 / EN 16510-2-6:2022

CE

A+

STOVE PACKAGE



L (cm)	H (cm)	P (cm)
80	72	71


Volume (m³)	0,41
Gross weight (kg)	103
Net weight (kg)	94

STORAGE



N° (max)
2

TRANSPORT



57 pz

Rev. 30102026